



S52232

(12V22.0Ah)
(88.2w/cell)

SIGA Energia series is especially designed for heavy load discharge applications with 10 years design life in float service. By using strong grids and specially designed active material this series offers stable performance during high current discharge requirements. The Energia offers 30% more power output than the standard range. Suitable for UPS/EPS where high current loads are required.



Specification




Cells Per Unit	6
Voltage Per Unit	12
Capacity	88.2W@15min-rate to 1.67V per cell @25 °C
Weight	Approx. 6.0Kg
Max. Discharge Current	220A (5 sec), Cold cranking 320A/EN
Internal Resistance	Approx. 10 mΩ
Operating Temperature Range	Discharge: -20 °C~60 °C Charge: 0 °C~50 °C Storage: -20 °C~60 °C
Normal Operating Temperature Range	25 °C ± 5 °C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25 °C
Recommended Maximum Charging Current Limit	6.6 A
Equalization and Cycle Service	14.4 to 15.0 VDC/unit Average at 25 °C
Self Discharge	SIGA Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Faston tabF3/F13
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Dimensions

Unit: mm

Dimension: 181(L) × 77(W) × 167(H)

Terminal F3/F13



Constant Current Discharge Characteristics : A(25 °C)

F.V/Time	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
9.60V	93.92	69.44	62.42	46.26	37.92	27.94	15.74	12.42
10.0V	92.64	68.91	61.45	45.18	36.76	27.33	15.57	12.28
10.2V	89.80	64.75	58.19	43.41	35.97	26.68	15.09	11.96
10.5V	86.72	59.91	53.16	41.20	34.49	25.79	14.54	11.82
10.8V	80.06	55.62	47.60	39.34	33.53	22.50	13.99	11.44
11.1V	73.40	51.33	43.80	37.49	32.58	20.53	13.43	11.07


Constant Power Discharge Characteristics : W(25 °C)

F.V/Time	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
9.60V	1016.2	759.0	686.5	538.7	419.3	309.4	175.1	138.5
10.0V	1014.8	757.4	681.3	529.3	409.9	304.5	173.6	137.0
10.2V	991.1	721.6	650.3	513.7	405.4	302.2	171.7	136.6
10.5V	966.5	676.7	605.1	497.7	395.5	296.5	168.7	136.0
10.8V	911.1	634.8	593.3	476.8	383.7	264.4	164.8	134.8
11.1V	855.7	592.9	581.6	455.9	371.9	245.5	161.0	133.6

All mentioned values are average values(Tolerance ±2%).




Life characteristics of cyclic use

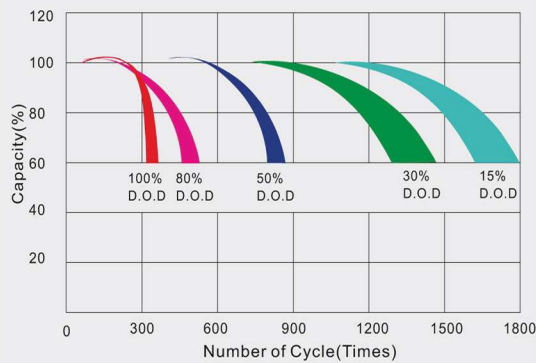


Storage characteristic



Charge characteristic Curve for standby use

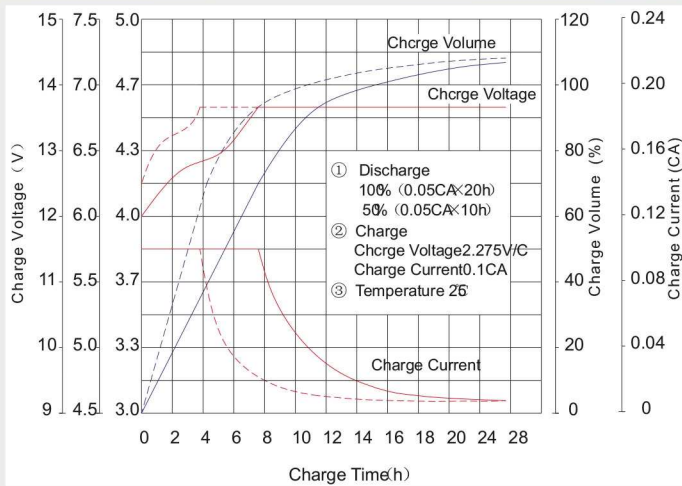

Discharge characteristic Curve

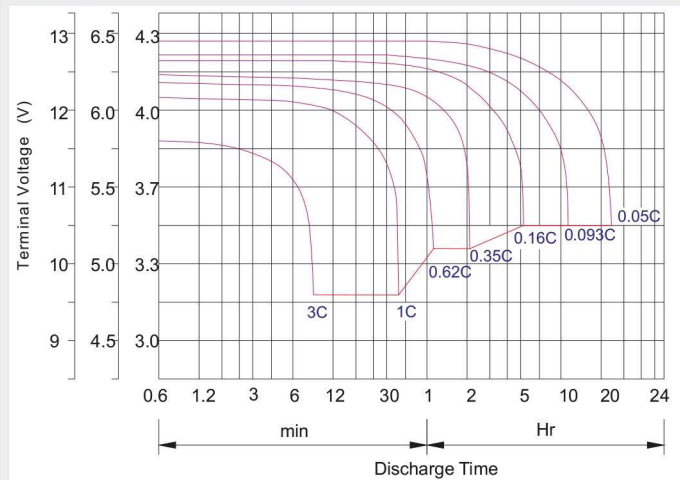

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	2V	50%	70%	74%	80%	88%	98%	100%	102%	104%	105%
	6V&12V	60%	75%	80%	85%	90%	98%	100%	103%	105%	106%
AGM Battery	2V	46%	66%	70%	80%	90%	99%	100%	103%	107%	109%
	6V&12V	55%	70%	76%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Charge the batteries at least once every six months, if they are stored at 25 °C.

Charging Method:

Constant Voltage	-0.2Cx2h +2.4~2.5V/Cellx24h,Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h

Maintenance & Cautions

Float Service:

- ※ Every month, recommend inspection every battery voltage.
- ※ Every three months, recommend equalization charge for one time.

Equalization charge method:

Discharge: 100% rate capacity discharge.

Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.

- ※ Effect of temperature on float charge voltage: -3mV/ °C/Cell.
- ※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.