



LITHIUM IONEN POWER AKKU

LiFePO4 Block

S26-L (12.8V-26Ah)



Electrical Characteristics

Nominal Voltage	12.8V
Nominal Capacity	26AH
Energy	332.8Wh
Internal Resistance	50mΩ
Cycle life	>2000 cycles at 0.2C 100% DOD
Months Self Discharge	<3%
Efficiency of Charge	100% at 0.5C
Efficiency of discharge	96~99% at 1C

Charge

Charge volt	14.6+/-0.2V
Charge Mode	CC at 0.2C to 14.6V, then at CV14.6V to charge current less than 0.02C
Charge Current	5.2A
Max. Charge current	26A
Charge cut off voltage	15.6V+/-0.2V

Discharge

Max. Continuous Current	26A
Max. Pulse Current	60A (<3s)
Discharge Cut-off Voltage	8V

Environment

Charge Temperature	0°C to 45°C (32F to 113F) at 60±25% Relative Humidity
Discharge Temperature	- 20°C to 60°C (-4F to 140F) at 60±25% Relative Humidity
Storage Temperature	0°C to 40°C (32F to 104F) 60±25% Relative Humidity
Water Dust Resistance	IP56


Mechanical

Cell material	LiFePO4
Plastic Case	ABS
Dimensions (in./mm)	175*166*125mm
Weight (lbs./kg.)	4.2KG
Terminal	M5

BMS

Protection function	Over charge protection, Over discharge protection, Over current protection, Short current protection, Balanced function, Temperature protection
---------------------	-------------------------------------------------------------------------------------------------------------------------------------------------

Dimensions

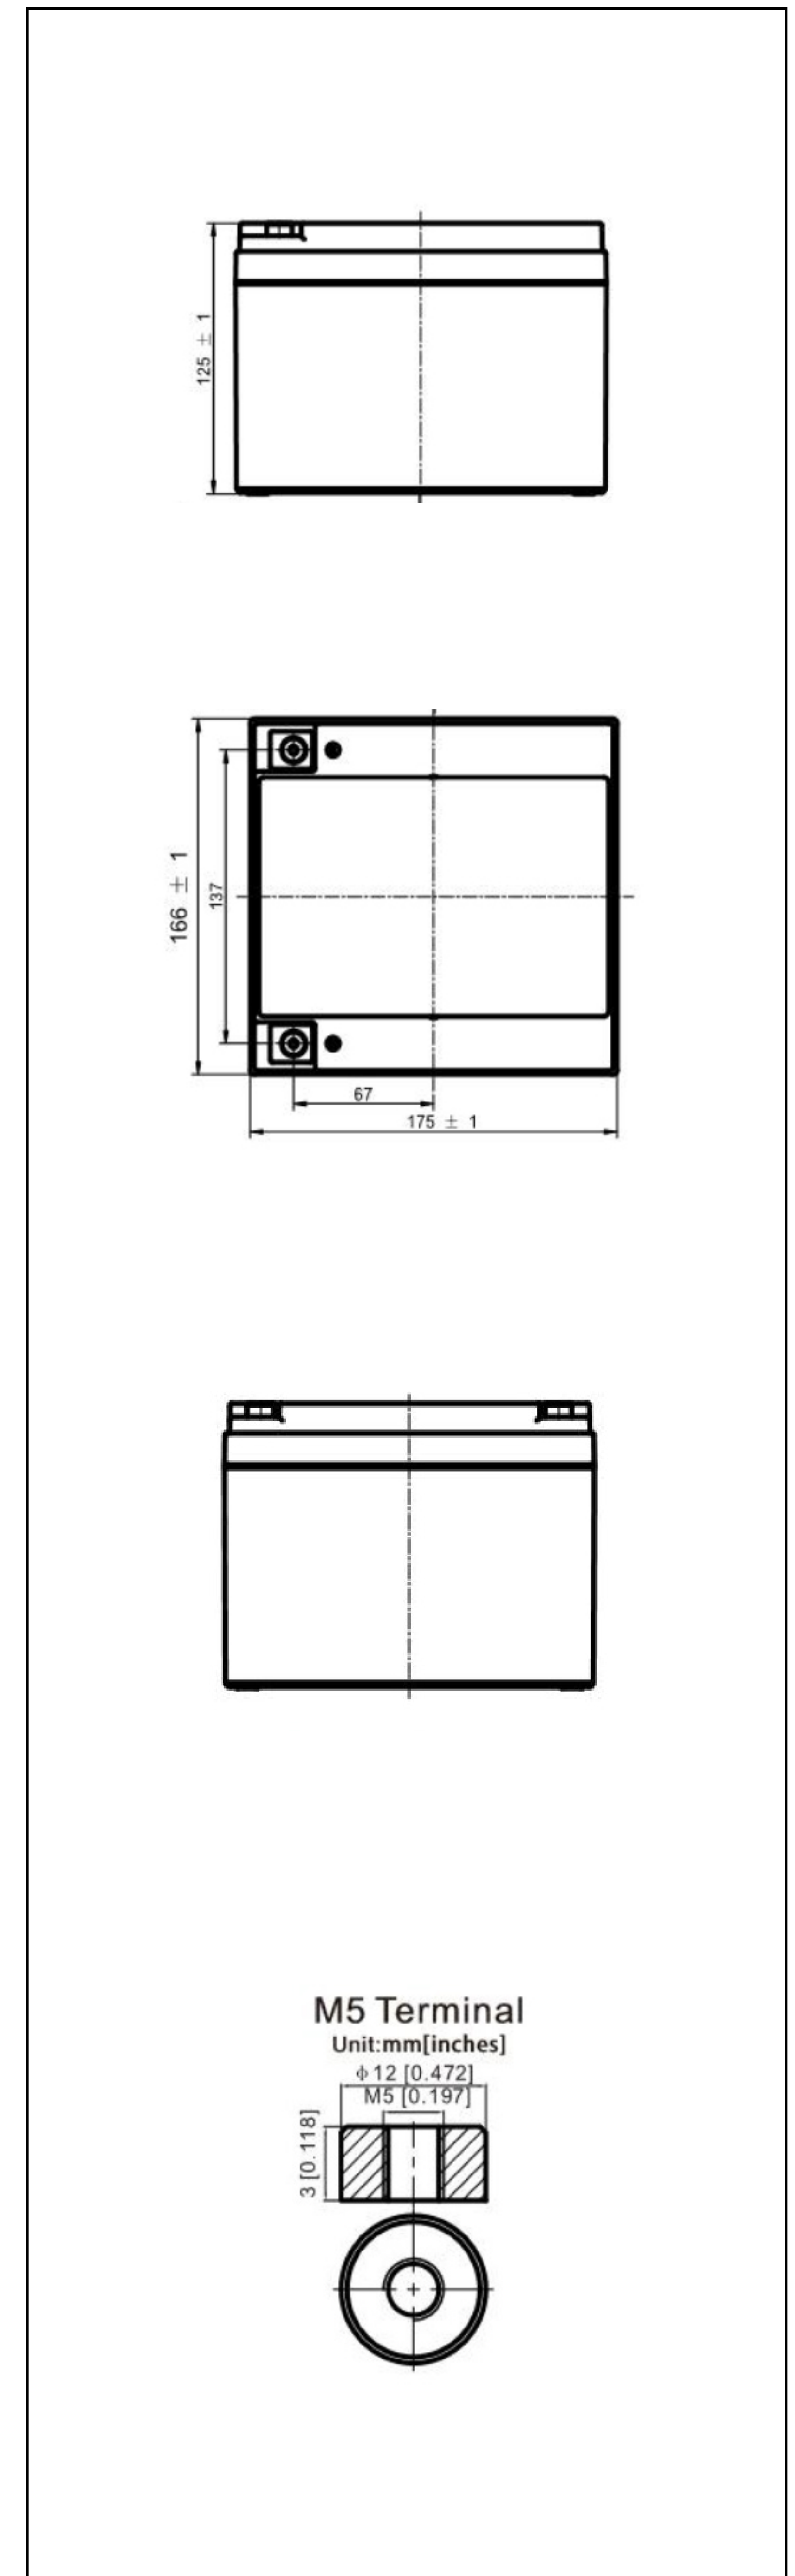

Discharge Characteristic

